

Blinds by Peter Meyer
 orders@petermeyerblinds.com.au
 www.weinoraustralia.com.au

Quote/offer Order

Customer name

BiConnect radio control

BiConnect sensors

<input type="checkbox"/> BiSens SW 230V	<input type="checkbox"/> BiSens SWR 230V
<input type="checkbox"/> BiSens SW Solar+	<input type="checkbox"/> BiSens Agido-3V

(With telescopic posts or Valance Plus, no sensors should be used or they have to be switched to manual operation.)

BiConnect radio transmitter

<input type="checkbox"/> BiEasy 1M	<input type="checkbox"/> BiEasy 5M
<input type="checkbox"/> BiEasy 15M Go!	
<input type="checkbox"/> BiEasy 1MW-3V (wall transmitter, white)	

The hand transmitter is available in two colours to choose from

<input type="checkbox"/> black	<input type="checkbox"/> silver
--------------------------------	---------------------------------

Customer number

--	--	--	--	--	--	--

weinor sales representative

Somfy hand transmitter

<input type="checkbox"/> Situo 1 io Pure II	<input type="checkbox"/> Situo 1 RTS Pure II
<input type="checkbox"/> Situo 5 io Pure II	<input type="checkbox"/> Situo 5 RTS Pure II
<input type="checkbox"/> Situo 5 Variation A/M io Pure II	<input type="checkbox"/> Situo 1 Soliris RTS Pure II
	<input type="checkbox"/> Situo 5 Soliris RTS Pure II

Somfy controls (separate order form)

Order number/reference

Order date

Customer requested delivery date

Fixing brackets

Installation on C20/25 concrete walls with a casing of up to 200 mm, wind resistance class 2 and a permissible centric tensile load for anchor bolts of 5.71 kN.

For other surfaces/assembly configurations, please enter the quantity and article number of the relevant brackets.

Quantity _____ Article no. _____

Quantity _____ Article no. _____

Or enter the quantity of the required brackets/mounting plates individually (in pieces):

Standard wall bracket 250 mm	<input type="checkbox"/>	Wall bracket 430 mm	<input type="checkbox"/>
Mounting plate 660 x 220 x 15 mm	<input type="checkbox"/>	Mounting plate 660 x 390 x 15 mm	<input type="checkbox"/>
Ceiling front plate 540 x 220 x 15 mm	<input type="checkbox"/>	Shim plate 160 x 150 x 15 mm	<input type="checkbox"/>
Roof angle bracket incl. 1 standard wall bracket 250 mm complete		<input type="checkbox"/>	
Rafter bracket left + standard wall bracket	<input type="checkbox"/>	Rafter bracket right + standard wall bracket	<input type="checkbox"/>
Rafter bracket left with mounting plate + standard wall bracket	<input type="checkbox"/>	Rafter bracket right with mounting plate + standard wall bracket	<input type="checkbox"/>

Accessories

<input type="checkbox"/> weinor Tempura heating system (separate order form)
--

Different delivery address to normal/miscellaneous

<input type="checkbox"/> Semina Life	<input type="checkbox"/>	<input type="checkbox"/> Semina Life Valance Plus	<input type="checkbox"/>
<input type="checkbox"/> Semina Life LED	<input type="checkbox"/>	<input type="checkbox"/> Semina Life Valance Plus LED	<input type="checkbox"/>

Quantity _____

Width _____ Projection angle _____

For LED models: fixed number of LED spots, see price list

Frame colour

<input type="checkbox"/> RAL colour	<input type="checkbox"/> Trend colour
-------------------------------------	---------------------------------------

Colour name _____

Fabric

<input type="checkbox"/> Fabric sewn with PTFE yarn

Pattern no. _____

With BiConnect radio control

<input type="checkbox"/> yes	<input type="checkbox"/> no
------------------------------	-----------------------------

Motor drive (viewed from the outside)

<input type="checkbox"/> Motor left	<input type="checkbox"/> Motor right
-------------------------------------	--------------------------------------

<input type="checkbox"/> Becker (standard)	<input type="checkbox"/> Becker test lead required
<input type="checkbox"/> Somfy RTS motor	<input type="checkbox"/> Somfy io-homecontrol® radio motor

Caution! The BiConnect radio control can only be delivered with the Becker motor.

Gear drive (only one unit max. projection 350 cm) left right

Length of handle (in mm)


<input type="checkbox"/> 800	<input type="checkbox"/> 1000	<input type="checkbox"/> 1200	<input type="checkbox"/> 1400	<input type="checkbox"/> 1600	<input type="checkbox"/> 1800	<input type="checkbox"/> 2000
------------------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------	-------------------------------

<input type="checkbox"/> Manual exit wall mounting
<input type="checkbox"/> Manual exit roof mounting

Bracket positions

Required position

Warning: brackets and arm positions are always the same.
Max. tolerance ± 10 cm. Centre bracket from 550 cm as standard.

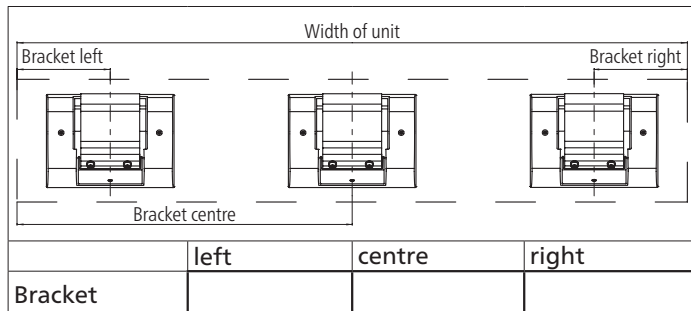

Warning: In the required position, the number of LED spots may differ from the standard number

Semina Life with Valance Plus

Options for Semina Life Valance Plus

- with motor (standard as awning side)
 with gear drive

Gear drive

- left right

Gear handle length (in mm)	<input type="checkbox"/> 600	<input type="checkbox"/> 800	<input type="checkbox"/> 1000
	<input type="checkbox"/> 1200	<input type="checkbox"/> 1400	<input type="checkbox"/> 1600

Valance Plus height (in mm)	<input type="checkbox"/> 1000	<input type="checkbox"/> 1500	<input type="checkbox"/> 2100
-----------------------------	-------------------------------	-------------------------------	-------------------------------

Fabric*

Pattern no. _____

Quick fabric selection for Valance Plus

Recommendation: use extra-wide fabrics to avoid a fabric seam.

<input type="checkbox"/> StarScreen fabrics				
<input type="checkbox"/> 7-108	<input type="checkbox"/> 7-109	<input type="checkbox"/> 7-106	<input type="checkbox"/> 7-110	<input type="checkbox"/> 7-103
<input type="checkbox"/> 7-105	<input type="checkbox"/> 7-104	<input type="checkbox"/> 7-111	<input type="checkbox"/> 7-107	<input type="checkbox"/> 7-100
<input type="checkbox"/> 7-101	<input type="checkbox"/> 7-102			

<input type="checkbox"/> Soltis® 86 fabrics ^{*2} only in 177 cm unit widths				
<input type="checkbox"/> 86-2044	<input type="checkbox"/> 86-2175	<input type="checkbox"/> 86-2135	<input type="checkbox"/> 86-2166* ²	<input type="checkbox"/> 86-2045
<input type="checkbox"/> 86-2043	<input type="checkbox"/> 86-2171	<input type="checkbox"/> 86-2167	<input type="checkbox"/> 86-2047	
BiColour:	<input type="checkbox"/> 86-2046	<input type="checkbox"/> 86-2048	<input type="checkbox"/> 86-2068* ²	

<input type="checkbox"/> Soltis® 92 fabrics ^{*2} only in 177 cm unit widths				
<input type="checkbox"/> 92-2044	<input type="checkbox"/> 92-2175	<input type="checkbox"/> 92-2135	<input type="checkbox"/> 92-2166* ²	<input type="checkbox"/> 92-2045
<input type="checkbox"/> 92-2043	<input type="checkbox"/> 92-2171	<input type="checkbox"/> 92-2167	<input type="checkbox"/> 92-2047	
BiColour:	<input type="checkbox"/> 92-2046	<input type="checkbox"/> 92-2048	<input type="checkbox"/> 92-2068* ²	

<input type="checkbox"/> Perluca air-permeable acrylic fabrics			
<input type="checkbox"/> 3-830P	<input type="checkbox"/> 3-708P	<input type="checkbox"/> 3-509P	<input type="checkbox"/> 3-720P

<input type="checkbox"/> Fibreglass screen (max. valance length 1500 mm)				
<input type="checkbox"/> 7-201	<input type="checkbox"/> 7-202	<input type="checkbox"/> 7-203	<input type="checkbox"/> 7-204	<input type="checkbox"/> 7-205
<input type="checkbox"/> 7-206	<input type="checkbox"/> 7-207	<input type="checkbox"/> 7-208	<input type="checkbox"/> 7-209	<input type="checkbox"/> 7-210
<input type="checkbox"/> 7-211	<input type="checkbox"/> 7-212	<input type="checkbox"/> 7-213	<input type="checkbox"/> 7-214	<input type="checkbox"/> 7-215
<input type="checkbox"/> 7-216	<input type="checkbox"/> 7-217	<input type="checkbox"/> 7-218	<input type="checkbox"/> 7-219	<input type="checkbox"/> 7-220

<input type="checkbox"/> Seamless plain acrylic fabrics			
<input type="checkbox"/> 3-830	<input type="checkbox"/> 3-708	<input type="checkbox"/> 3-509	<input type="checkbox"/> 3-720

* The following designs are not available for Valance Plus:
6-334, 6-335, 6-390, 6-397, 6-400, 6-403, 6-409, 6-410, 6-415

The order is placed according to the valid general terms of delivery and payment of weinor.

Signature _____